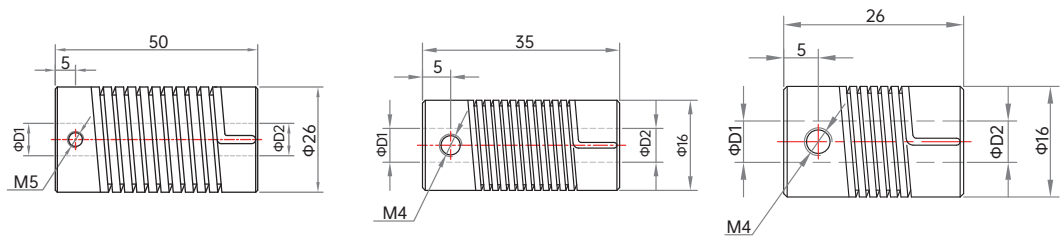


描述 Describe	镀镍弹簧钢联轴器 Nickel-plated spring steel coupling	镀镍弹簧钢联轴器 Nickel-plated spring steel coupling	镀镍弹簧钢联轴器 Nickel-plated spring steel coupling
----------------	---	---	---

 产品图
Product drawing

 尺寸图
Size chart


型号 Model	8215	8215B	8224
额定转速 Nominal Torque	3000min ¹	3000min ¹	3000min ¹
最大径向位移 Radial displacement max	±1.5mm	±1mm	±0.5mm
最大轴向位移 Axial displacement max	±1mm	±1mm	±0.5mm
最大角度偏差 Angular displacement max	±5°	±5°	±3°
瞬时惯性 Moment of inertia	96g/cm ²	80g/cm ²	50g/cm ²
材质 Material	镀镍弹簧钢 Nickel-plated spring steel	镀镍弹簧钢 Nickel-plated spring steel	镀镍弹簧钢 Nickel-plated spring steel
最大扭矩 Maximum torque	1.5Nm	0.5Nm	0.5Nm
安装方式 Installation	内六角凹端顶丝 Hexagon socket top wire	内六角凹端顶丝 Hexagon socket top wire	内六角凹端顶丝 Hexagon socket top wire
重量 Weight	120g	30g	30g
订货型号 Order type			
同系列选项 The same series of options	D1 D2	D1 D2	D1 D2
	8215 6-6 6 6	8215B 6-6 6 6	8224 6-6 6 6
	8215 8-8 8 8	8215B 8-8 8 8	
	8215 10-10 10 10		
	8215 12-12 12 12		
	8215 14-14 14 14		